



PERRY EQUIPMENT CORPORATION

ISO 9001

Quad-Pure Liquid Filter Elements

*PECO introduces an absolute addition to the Quad-Pure family. The **Quad-Pure QPA** melt blown filter is designed for critical applications where product and process efficiency are of the utmost concern. The thermally bonded microfiber technology employed in the construction of the QPA ensure high flux rates while providing optimized porosity.*



Construction

- | | |
|------------|------------------------|
| • Media | Polypropylene or Nylon |
| • Core* | Polypropylene or Nylon |
| • End Caps | Polypropylene or Nylon |

Operational Data

- | | |
|----------------------------------|--------------------------------|
| • Recommended Element Change Out | 20 psid |
| • Maximum Operating Temperature | |
| Polypropylene | 180 deg. F/82 deg. C |
| Nylon | 300 deg F/150 deg. C |
| • Maximum Pressure Drop | |
| Polypropylene | 60 psi @ 104 deg. F/40 deg. C |
| Nylon | 44 psi @ 300 deg. F/150 deg. C |
| • Standard Flow Direction | Outside to inside of element |

Specification Data

- | | |
|------------------|---|
| • Micron Ratings | 0.8, 1, 3, 5, 10, 20, 30, 50, 75 |
| • FDA | All materials meet U.S. Food & Drug Administration requirements for food and beverage service |
| • NSF | Certified to NSF 42 & 53 |
| • USP | Certified to USP 21 class VI toxicity |

* Nylon elements contain Glass filled Nylon cores.


PRODUCT ADVANTAGES

- 100% Polypropylene or Nylon construction.
- 100% thermal bonding. No binders or adhesives for superior chemical compatibility


APPLICATIONS

- Chemical
- Electronics
- Pharmaceuticals
- Food & Beverage
- Coatings
- Inks
- Paints

Flow Characteristics

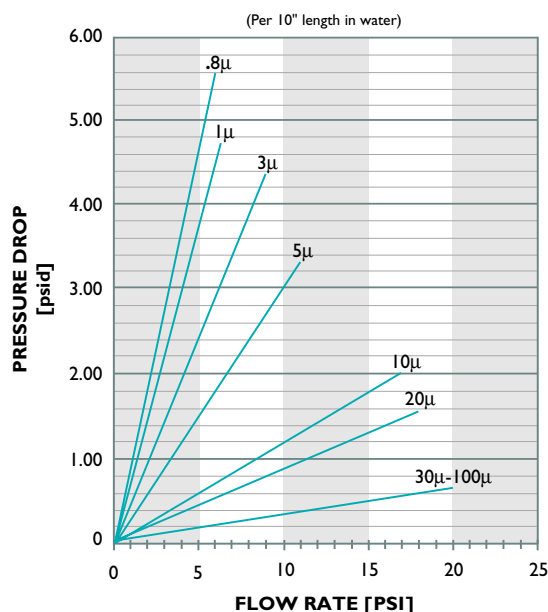

Nomenclature

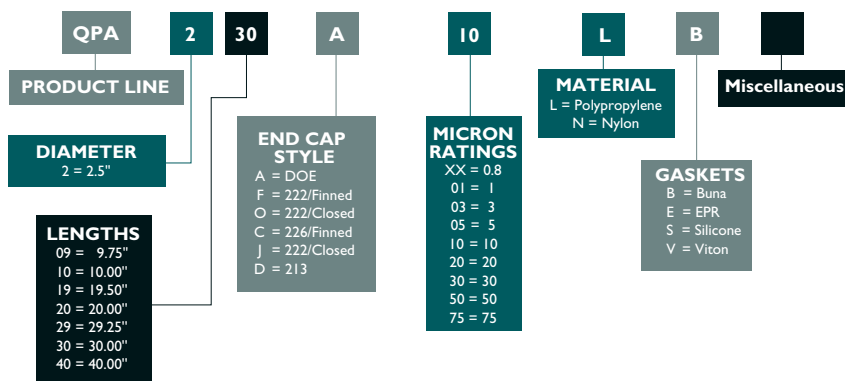

e-mail:
elements@perryequipment.com
web site:
www.perryequipment.com

Corporate Offices & Plant

PERRY EQUIPMENT CORPORATION
Wolters Industrial Park
P.O. Box 640
Mineral Wells, Texas 76068
Telephone: 940-325-2575
800-877-PECO
Telefax: 940-325-4622
e-mail: sales@perryequipment.com

Houston Branch Office

1758 West Sam Houston Parkway N.
Houston, Texas 77043-3115
Telephone: 713-973-2575
Telefax: 713-467-0475
e-mail: houstonsales@perryequipment.com

Perry Equipment Italiana S.R.L.

Via Camozzi, 106
24121 Bergamo (BG)
Italy
Telephone: 3903-523-6340
Telefax: 3903-523-6380
e-mail: italysales@perryequipment.com

Please refer to
www.perryequipment.com
for most current
literature edition.

Perry Equipment De México

Parque Industrial Querétaro
Calle Cerrada La Noria #108
Santa Rosa Jaurequi
Querétaro, Querétaro, México C.P. 76220
Telephone: 52-442-242-1234
Telefax: 52-442-242-1235
e-mail: mexicosales@perryequipment.com

Perry Filtration Sdn. Bhd.

35-5 Jalan SP 2/I
Taman Serdang Perdana, Seksyen 2,
43300 Seri Kembangan
Selangor D.E., Malaysia
Telephone: 603-8941-2366
Telefax: 603-8941-1366
e-mail: asiasales@perryequipment.com

Middle East Sales Office

Perry Equipment Corporation
P.O. Box 10895
Manama, Bahrain
Telephone: 973-1729-3309
Telefax: 973-1729-4728
e-mail: bahrainsales@perryequipment.com

Peco Filters, Ltd.

1351 Hastings Crescent S.E.
Calgary, Alberta
Canada T2G-4C8
Telephone: 403-243-6700
Telefax: 403-287-9304
e-mail: canadasales@perryequipment.com

European Offices

PERRY EQUIPMENT LTD.
Brunel Business Court
Brunel Way, Thetford
Norfolk IP24 1HP
England
Telephone: 01842 821000
Telefax: 01842 821050
e-mail: uksales@perryequipment.com
www.perry-equipment.co.uk